


# Sprinter RX

## Standard geometries

FRAME SIZE VR		Typical Rider Height	Effective Top Tube Lenght	Seat Tube Lenght to Top	Effective Chainstay lenght	Bottom Bracket Height	Head Tube Lenght	Maximum high	Fork rake	Head Tube Angle	Seat Tube Angle
cm	inch	V-cm	A1-mm	B2-mm	C1-mm	D-mm	F-mm	I-mm	K-mm	$\alpha$ -°	$\beta$ -°
54	21,3	171-172	545	480	392	265	105	509	43	72	74,2
55	21,7	173-175	550	490	392	265	105	509	43	72	74,5
56	22,0	176-177	555	500	392	265	115	520	43	72,5	74,7
57	22,4	178-180	561	510	395	265	125	529	43	72,5	75
58	22,8	181-182	566	520	395	265	135	540	43	73	75
59	23,2	183-185	571	530	395	265	145	550	43	73	75,2
60	23,6	186-187	577	540	395	265	155	560	43	73	75,5
61	24,0	188-190	583	550	395	265	165	569	43	73	75,7
62	24,4	191-192	589	560	395	265	175	579	43	73	76

Geometre je platná pro rok 2009. Výrobce si vyhrazuje právo změny.

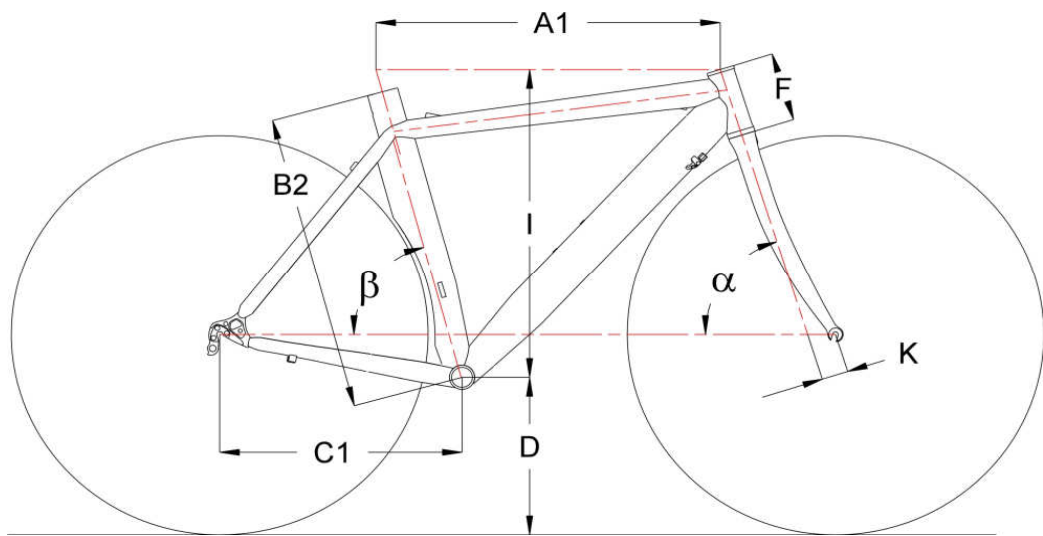

## Customer's geometry

FRAME SIZE VR		Typical Rider Height	Effective Top Tube Lenght	Seat Tube Lenght to Top	Effective Chainstay lenght	Bottom Bracket Height	Head Tube Lenght	Maximum high	Fork rake	Head Tube Angle	Seat Tube Angle
cm	inch	V-cm	A1-mm	B2-mm	C1-mm	D-mm	F-mm	I-mm	K-mm	$\alpha$ -°	$\beta$ -°